


RECESSED NUTS & PINS

Material: ASTM A-36, 4140, Stainless Steel

Threads: U.N.C., Class 2A, Right or Left Hand

Finish: Self-Colored, Plated

Options: Special Machining and Threading

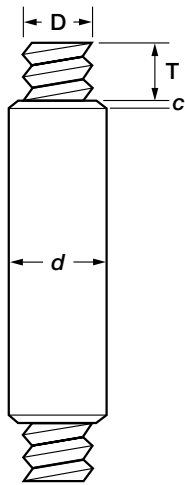

| Pin Diameter | | Thread | | | NUT (Suggested Dimensions) | | | | | | | |
|-------------------|-------|-------------------------------|--------------------|----------|----------------------------|----------|----------|-------------------|-------------------|---------------------------|--------------------------|--|
| Sizes <i>d</i> | | Diameter (In.) <i>D</i> | Length <i>T</i> | <i>c</i> | <i>t</i> | <i>W</i> | <i>C</i> | Recess | | Diameter Rough Hole | Unit Weight (Lbs.) | |
| | | | | | | | | Rough Diameter | Depth <i>s</i> | | | |
| 2 | 2 1/4 | 1 1/2 | 1 | 1/8 | 7/8 | 3 | 3 3/8 | 2 5/8 | 1/4 | 1 1/4 | 1 | |
| 2 1/2 | 2 3/4 | 2 | 1 1/8 | 1/8 | 1 | 3 5/8 | 4 1/8 | 3 1/8 | 1/4 | 1 3/4 | 2 | |
| 3 | 3 1/4 | 2 1/2 | 1 1/4 | 1/8 | 1 1/8 | 4 3/8 | 5 | 3 7/8 | 3/8 | 2 1/4 | 3 | |
| 3 3/4 | 4 | 3 | 1 3/8 | 1/4 | 1 1/4 | 4 7/8 | 5 5/8 | 4 3/8 | 3/8 | 2 3/4 | 4 | |
| 4 1/4 | 4 1/2 | 3 1/2 | 1 1/2 | 1/4 | 1 3/8 | 5 3/4 | 6 5/8 | 5 1/4 | 1/2 | 3 1/4 | 5 | |
| 5 | 5 1/2 | 4 | 1 5/8 | 1/4 | 1 1/2 | 6 1/4 | 7 1/4 | 5 3/4 | 1/2 | 3 3/4 | 6 | |
| 5 1/2 | 5 3/4 | 4 1/2 | 1 3/4 | 1/4 | 1 5/8 | 7 | 8 1/8 | 6 1/2 | 5/8 | 4 1/4 | 8 | |
| 6 1/4 | 6 1/2 | 5 | 1 7/8 | 3/8 | 1 3/4 | 7 5/8 | 8 7/8 | 7 | 5/8 | 4 3/4 | 10 | |
| 6 3/4 | 7 | 5 1/2 | 2 | 3/8 | 1 7/8 | 8 1/8 | 9 3/8 | 7 1/2 | 3/4 | 5 1/4 | 12 | |
| 7 1/4 | 7 1/2 | 5 1/2 | 2 | 3/8 | 1 7/8 | 8 5/8 | 10 | 8 | 3/4 | 5 1/4 | 14 | |
| 7 3/4 | 8 | 6 | 2 1/4 | 3/8 | 2 1/8 | 9 3/8 | 10 7/8 | 8 3/4 | 3/4 | 5 3/4 | 19 | |
| 8 1/2 | 8 3/4 | 6 | 2 1/4 | 3/8 | 2 1/8 | 10 1/4 | 11 7/8 | 9 5/8 | 3/4 | 5 3/4 | 24 | |
| 9 1/4 | 9 1/2 | 6 | 2 3/8 | 3/8 | 2 1/4 | 11 1/4 | 13 | 10 5/8 | 3/4 | 5 3/4 | 32 | |
| 9 3/4 | 10 | 6 | 2 3/8 | 3/8 | 2 1/4 | 11 1/4 | 13 | 10 5/8 | 3/4 | 5 3/4 | 32 | |

